

**Applications**

 Agriculture  
 Construction and Demolition

 Landscaping  
 Road work, Recycling and Cleaning

**Main features**

Designed and built specifically for Bobcat® loaders.

Hydraulic side shift capability to trench close to buildings, fences or other objects. Get even closer by removing the auger.

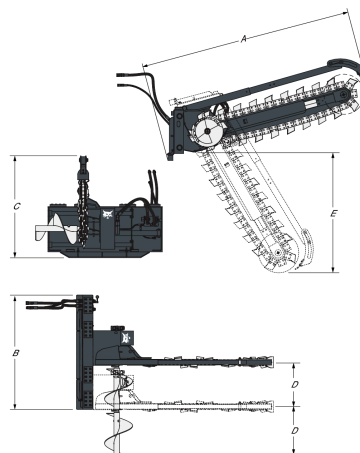
Changing to a trencher attachment is quick and easy with the Bob-Tach™ mounting system.

**Compatibility**

Description	Item number	Compatible with loader Compatible with excavator Compatible with telescopic
Trencher LT112 w/ Chain Complete	TRN112X2X4*851579	S70-E, MT55, ,
Trencher LT113 w/ Chain Complete	TRN113X3X4*851581	S70-E, MT55, ,
Trencher LT213 w/ Chain Complete	TRN213X3X4*851583	S100, T110-E, S450-E, T450-E, S450-B, T110-B, ,
Trencher LT313 w/ Chain Complete	TRN313X4X6*851585	S530-E, S530-B, S550-E, S550-B, S570-E, S570-B, S590-E, S590-B, S630-E, S650-E, T650-E, S510-E, S510-B, S450-E, T450-E, S630-E2, S650-E2, T650-E2, S550-E2, S570-E2, S590-E2, T590-E2, S450-B, S630-B, S650-B, T650-B, , T2250
Trencher LT405 w/ Chain w/o Teeth	6906100	S630-E, S650-E, T650-E, S770-E, T770-E, A770-E, S530-E, S530-B, S550-E, S550-B, S570-E, S570-B, S590-E, S590-B, S630-E2, S650-E2, T650-E2, S770-E2, T770-E2, A770-E2, S550-E2, S570-E2, S590-E2, T590-E2, S630-B, S650-B, S770-B, T650-B, T770-B, A770-B, ,
Trencher LT414 w/ Chain Complete	TRN414X5X6*851587	S630-E, S650-E, T650-E, S530-E, S530-B, S550-E, S550-B, S570-E, S570-B, S590-E, S590-B, S630-E2, S650-E2, T650-E2, S550-E2, S570-E2, S590-E2, T770-E, T770-E2, S770-E, S770-E2, A770-E, A770-E2, T590-E2, S630-B, S650-B, S770-B, T650-B, T770-B, A770-B, ,
Trencher, MX112 (Non-CE)	6959136	, E45, E50, E55, E32, E35, E45, E50, E55,

**Characteristics and Performance**

Description	Item number	Digging depth (mm)	Trench width (mm)	Boom length (mm)	Required hydraulic flow (L/min)	Side shift (mm)
Trencher LT112 w/ Chain Complete	TRN112X2X4*851579	600.0	101.0-203.0	1000.0	34.0-57.0	409.0
Trencher LT113 w/ Chain Complete	TRN113X3X4*851581	900.0	101.0-203.0	1334.0	34.0-57.0	409.0
Trencher LT213 w/ Chain Complete	TRN213X3X4*851583	900.0	101.0-203.0	1334.0	42.0-68.0	587.0
Trencher LT313 w/ Chain Complete	TRN313X4X6*851585	1200.0	152.0-305.0	1664.0	57.0-83.0	587.0
Trencher LT405 w/ Chain w/o Teeth	6906100	1219.0	152.0-305.0	1600.0	98.0-151.0	660.0
Trencher LT414 w/ Chain Complete	TRN414X5X6*851587	1575.0	152.0-305.0	2011.0	98.0-151.0	554.0
Trencher, MX112 (Non-CE)	6959136	600.0	101.0-203.0	1000.0	49.0-75.0	-

**Weights and dimensions**


Description	Item number	Operating weight (kg)	Shipping weight (kg)	Overall length (A) (mm)	Overall width (B) (mm)	Overall height (C) (mm)
Trencher LT112 w/ Chain Complete	TRN112X2X4*851579	279.0	279.0	1542.0	914.0	-
Trencher LT113 w/ Chain Complete	TRN113X3X4*851581	290.0	290.0	-	-	-
Trencher LT213 w/ Chain Complete	TRN213X3X4*851583	329.0	329.0	1880.0	1422.0	-
Trencher LT313 w/ Chain Complete	TRN313X4X6*851585	444.0	444.0	2273.0	1422.0	-

Description	Item number	Operating weight (kg)	Shipping weight (kg)	Overall length (A) (mm)	Overall width (B) (mm)	Overall height (C) (mm)
Trencher LT405 w/ Chain w/o Teeth	6906100	689.0	689.0	2820.0	1651.0	-
Trencher LT414 w/ Chain Complete	TRN414X5X6*851587	556.0	556.0	2642.0	1429.0	-
Trencher, MX112 (Non-CE)	6959136	258.0	258.0	-	-	-