

Applications

Agriculture
Forestry

Landscaping

Main features

The work group is mounted at an angle of 90 degrees to the operator for excellent visibility to the cutting area, giving the operator the same wide view as a pull-behind stump grinder. The swing cylinder design generates an impressive arc. This allows the operator to cut large stumps without repositioning. Rubber deflector shields and screening provide additional operator comfort and protection from wood chips.

The unique valve design controls the swing circuit speed to prevent the cutting wheel from stalling in the cut. Diverse cutting heights gives better access for a variety of size stumps.


Compatibility

Description	Item number	Compatible with loader
Stump Grinder SG30	7100641	S70-E, MT55
Stump Grinder SG60	6808034	S630-E, T870-E, S850-E, S650-E, T650-E, S770-E, T770-E, A770-E, S530-E, S530-B, S550-E, S550-B, S570-E, S570-B, S590-E, S590-B, S510-E, S510-B, S630-E2, S650-E2, T650-E2, S770-E2, T770-E2, A770-E2, S850-E2, T870-E2, S550-E2, S570-E2, S590-E2, T590-E2, S630-B, S650-B, S770-B, S850-B, T650-B, T770-B, T870-B, A770-B, T870-E2, T870-B
Stump Grinder SGX60 High Flow	7112201	S850-E, S630-E, S650-E, T650-E, S530-E, S530-B, S550-E, S550-B, S570-E, S570-B, S590-E, S590-B, T770-E, T870-E, S770-E, A770-E, S630-E2, S650-E2, T650-E2, S770-E2, T770-E2, A770-E2, S850-E2, T870-E2, S550-E2, S570-E2, S590-E2, T590-E2, S630-B, S650-B, S770-B, S850-B, T650-B, T770-B, T870-B, A770-B, T870-E2, T870-B

Characteristics and performance

Description	Item number	Max cutting height (mm) (mm)	Max cutting depth (mm)	Max cutting angle (°)	Grinder reach at ground level (mm)	Wheel diameter (mm)	Number of teeth	Required flow (l/min) (L/min)
Stump Grinder SG30	7100641	279.0	279.0	90.0	1175.0	457.0	16	38.0-53.0
Stump Grinder SG60	6808034	806.0	381.0	80.0	1880.0	686.0	32	64.0-121.0
Stump Grinder SGX60 High Flow	7112201	806.0	381.0	80.0	1880.0	686.0	32	95.0-151.0

Weights and dimensions

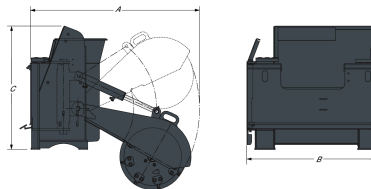

Description	Item number	Operating weight (kg)	Shipping weight (kg)	Overall length (A) (mm)	Overall width (B) (mm)	Overall height (C) (mm)
Stump Grinder SG30	7100641	171.0	171.0	1175.0	914.0	851.0
Stump Grinder SG60	6808034	445.0	445.0	2012.0	1670.0	1509.0
Stump Grinder SGX60 High Flow	7112201	451.0	451.0	2012.0	1676.0	1509.0